

LED Video Controller

Specification v1.5



Overview

LED Video Controller is a professional LED display control device with powerful video signal source and processing capabilities. It can handle up to 1920×1080 HD digital signals, supports various types of HD digital interfaces, and supports arbitrary zooming and clipping of video sources. In addition, the controller supports USB flash drive content playback. The controller has 2 gigabit network port outputs and can support maximum 3840 pixels in width and maximum 2000 pixels in height. At the same time, the controller has a series of practical functions, providing flexible screen control and high-quality image display, which can be perfectly applied to small LED display.

Features

Input

- Input resolution: max 1920×1080@60Hz.
- Signal sources: 2×HDMI1.4, 1×DVI, 1×VGA, 1×CVBS.
- U-disk interface: 1×USB.

Output

- Loading capacity: 1.3 million pixels.
- Maximum width is 3840 pixels or maximum height is 2000 pixels.
- 2 Gigabit Ethernet output ports.
- Supports Ethernet port redundancy.

Audio

- Input: 1×3.5mm.
- Output: 1×3.5mm, support HDMI and DP audio outputs.

Function

- Supports switching, clipping and zooming.
- Supports screen offset.
- Supports screen adjustment: contrast, saturation, chroma, brightness compensation and sharpness adjustment.
- Supports convert Limit Range to Full Range input color space.
- Supports send and read back screen correction factor, advanced stitching.
- Supports HDCP1.4.
- Supports Precise Color Management.


- Supports Better Gray Level at Low Brightness, can effectively maintain the complete display of grey scale under low brightness.
- 16 scene presets.
- Play back pictures and videos from U-disk.
- OSD for U-disk playback and screen adjustment (Remote controller optional).

Control

- USB port for control.
- RS232 protocol control.
- Infrared remote control (optional).

Appearance


Front panel

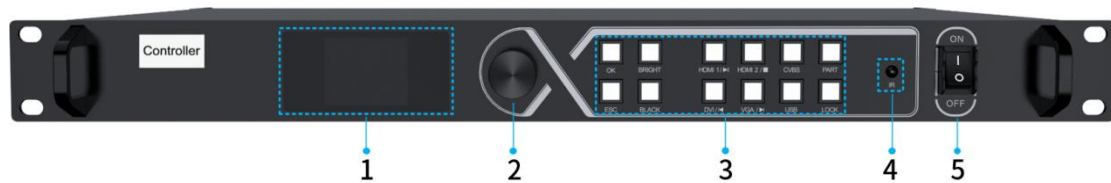

No.	Item	Function
1	LCD display	Display operation menu and system information.
2	Knob	<ul style="list-style-type: none"> • Press the knob to access the submenu or confirm. • Turn the knob to select menu items or adjust parameters.
3	Function button	<ul style="list-style-type: none"> • OK: Enter. • Bright: Adjust brightness. • ESC: Exit the current interface. • Black: Black the screen. • HDMI 1▶▶ / HDMI 2■ / DVI 1◀ / VGA ▶▶ : <ul style="list-style-type: none"> - Switching to a signal source by clicking corresponding button. - In U-disk playback mode, these buttons serve respectively as play/pause, stop, previous and next. • CVBS: Switch to CVBS. • PART: Clip the picture. • USB: Click the USB button to enter the U-disk playback mode. Click again to enter the console interface. • LOCK: Lock the buttons on the front panel.
4	IR	IR receiver.

5	Switch	Switch on/off.
---	--------	----------------


Rear panel

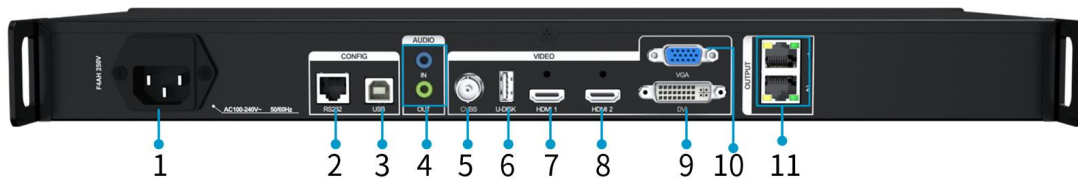


Power supply		
1	Power Socket	AC100-240V~, 50 / 60Hz, Connect to AC power supply.
Control		
2	RS232	RJ11 (6P6C) interface *, used to connect the central control.
3	USB	USB2.0 Type B interface, connect to PC for configuration.
Audio		
4	AUDIO IN	Interface type: 3.5mm Receive audio signals from computer or other equipment.
	AUDIO OUT	Interface type: 3.5mm Output audio signals to active speaker and other devices. (Support HDMI audio decoding and output)
Input		
5	CVBS	PAL/NTSC video input
6	U-DISK	<ul style="list-style-type: none"> • USB flash drive interface. • USB flash drive format supported: NTFS, FAT32, FAT16. • Image file formats: jpeg, jpg, png, bmp. • Video codec: MPEG1/2, MPEG4, Sorenson H.263, H.263, H.264(AVC1), H.265(HEVC), RV30/40, Xvid. • Audio codec: MPEG1/2 Layer I, MPEG1/2 Layer II, MPEG1/2 Layer III, AACLC, VORBIS, PCM, and FLAC. • Video resolution: maximum 1920×1080@30Hz.
7	HDMI 1	<ul style="list-style-type: none"> • 1 x HDMI1.4 input. • Maximum resolution: 1920×1080@60Hz. • Support EDID1.4. • Support HDCP1.4. • Support audio input.
8	HDMI 2	<ul style="list-style-type: none"> • 1 x HDMI1.4 input. • Maximum resolution: 1920×1080@60Hz. • Support EDID1.4.

		<ul style="list-style-type: none"> • Support HDCP1.4. • Support audio input.
9	DVI	<ul style="list-style-type: none"> • Maximum resolution: 1920×1080@60Hz. • Support EDID1.4. • Support HDCP1.4.
10	VGA	<ul style="list-style-type: none"> • Maximum resolution: 1920×1080@60Hz.
Output		
11	PORT 1-2	<ul style="list-style-type: none"> • 2 Gigabit Ethernet ports. • One network port load capacity: 655360 pixels. • Total load capacity is 1.3 million pixels, maximum width is 3840 pixels and maximum height is 2000 pixels. • It is highly recommended that the cable (CAT5E) length should not exceed 100m. • Support redundant backup.

* RJ11 (6P6C) to DB9 connecting diagram. The cable is optional.

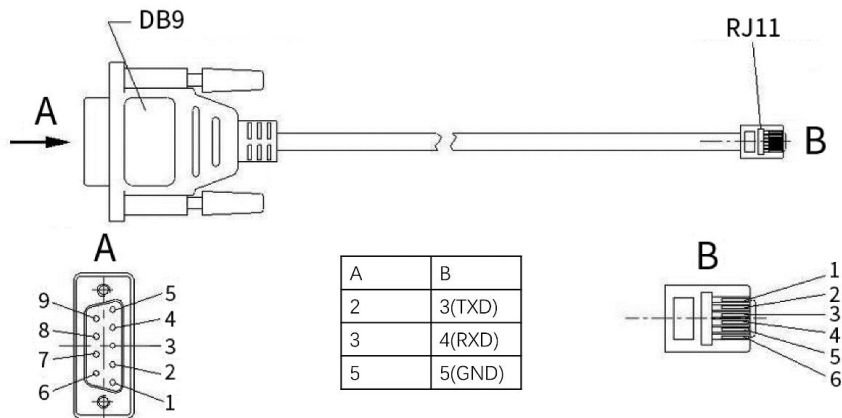

* Remote controller is optional.

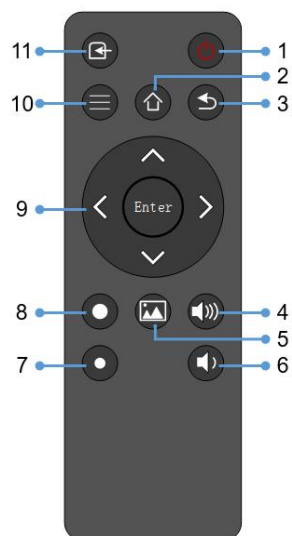

No.	Item	Function
1	Sleep/Wake up	Hibernate/wake up the device (one-button black screen switch)
2	Main menu	Open the OSD menu.
3	Back	Exit the OSD menu or return to previous menu
4	Volume +	Volume up
5	U-disk playback	Access the U-disk playback control interface
6	Volume -	Volume down
7	Bright -	Decrease the screen brightness
8	Bright +	Increase the screen brightness
9	Confirm + directions	Confirm and navigation buttons
10	Menu	Switch on/off the menu
11	Input signal sources	Switch input signal sources

Application scenarios



Signal format

Input	Color space	Sampling	Color depth	Max Resolution	Frame rate
DVI	RGB	4:4:4	8bit	1920×1080@60Hz	23.98, 24, 25, 29.97, 30, 50, 59.94, 60, 100, 120
HDMI 1.4	YCbCr	4:2:2	8bit	1920×1080@60Hz	23.98, 24, 25, 29.97, 30, 50, 59.94, 60, 100, 120
	YCbCr	4:4:4	8bit		
	RGB	4:4:4	8bit		

Other specification

Chassis size (W×H×D)	
Host	482.6mm (19.0") × 44.0mm (1.7") × 292.0mm (11.5")
Package	523.0mm (20.6") × 95.0mm (3.7") × 340.0mm (13.4")
Weight	
Net weight	3.13kg (6.90lbs)
Gross weight	4.16kg (9.17lbs)
Electrical Characteristics	
Input power	AC100-240V, 50/60Hz
Power rating	10W
Work condition	
Temperature	-20°C~65°C (-4°F~149°F)
Humidity	0%RH~80%RH, no condensation
Storage condition	
Temperature	-30°C~80°C (-22°F~176°F)
Humidity	0%RH~90%RH, no condensation

Reference dimensions

Unit: mm

